

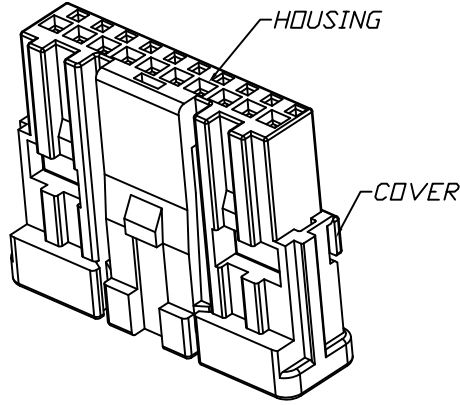


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

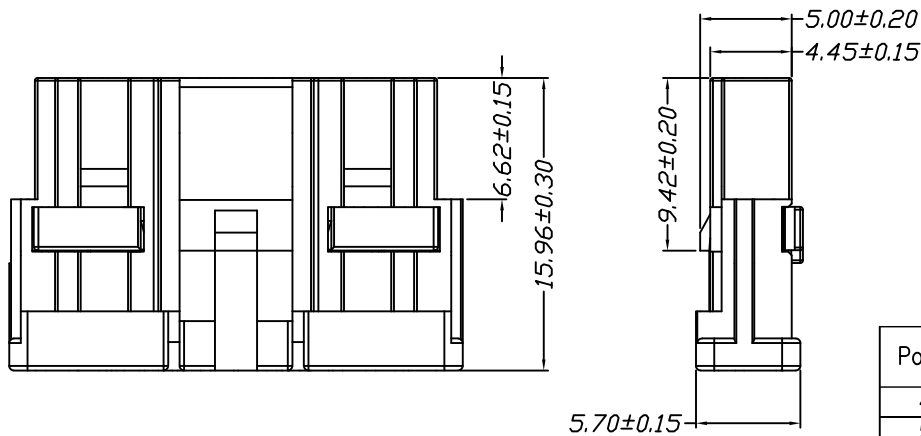

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 1A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

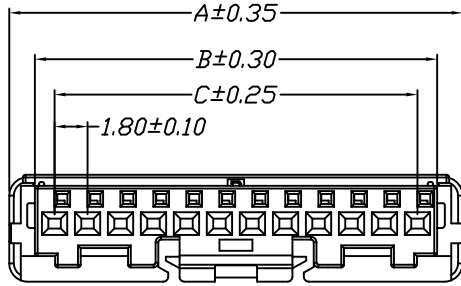

Poles	Dimensions			
	A	B	C	D
4	10.34	7.54	5.54	2.56
5	12.14	9.34	7.20	2.56
6	13.94	11.14	9.00	2.56
7	15.74	12.94	10.80	2.56
8	17.54	14.74	12.60	2.56
9	19.34	16.54	14.40	2.56
10	21.14	18.34	16.20	6.16
11	22.94	20.14	18.00	6.16
12	24.74	21.94	19.80	6.16
13	26.54	23.74	21.60	6.16
14	28.34	25.54	23.40	6.16
15	30.14	27.34	25.20	6.16
16	31.94	29.14	27.00	6.16
17	33.74	30.94	28.80	6.16
18	35.54	32.74	30.60	6.16
19	37.34	34.54	32.40	6.16
20	39.14	36.34	34.20	6.16

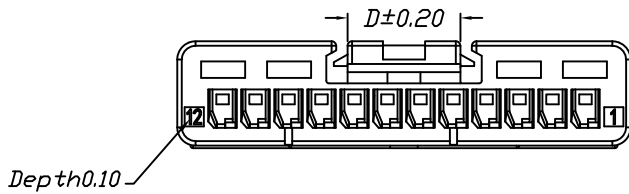

Material	Color
PA,UL94V-0	BLACK

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: WWW.SZSITUAO.CN 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP41801H00-NPA-G2-PA	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.35	X° REF±6°	DESIGNER					
	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权		2017.06.16	REV: A0
SIZE: A4	0.000±0.15	X° X'±2°	TITLE: 1. 80mm PITCH Housing					