
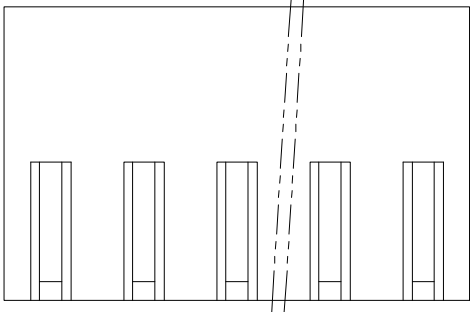
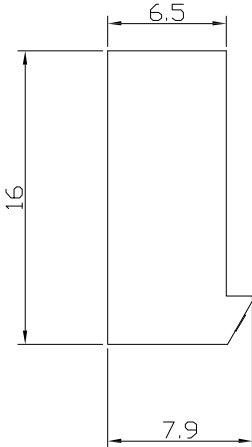
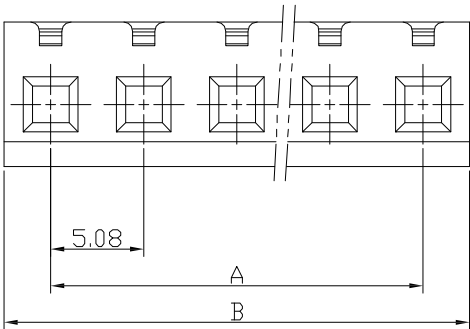


A		B		C		D		E		F		G		H																																														
仅供参考								REV.		REVISION RECORD				DATE																																														
								A0		新图面发行				2017. 06. 16																																														
								主要技术参数 Main Specifications 线 数 (Poles): 02 to 14 接触电阻 (Contact resistance): ≤ 20mΩ 绝缘电阻 (Insulation resistance): ≥ 1000MΩ 额定电压 (Rated voltage): 250V AC DC 额定电流 (Rated current): 5.0A AC DC 耐 电 压 (Withstand Voltage): 1500V AC/minute 温度范围 (Temperature Range) : -25℃ ~ +85℃																																																				
																																																												
								<table><tr><th>Poles</th><th colspan="2">Dimensions mm</th></tr><tr><td></td><th>A</th><th>B</th></tr><tr><td>2</td><td>5.08</td><td>10.16</td></tr><tr><td>3</td><td>10.16</td><td>15.24</td></tr><tr><td>4</td><td>15.24</td><td>20.32</td></tr><tr><td>5</td><td>20.32</td><td>25.40</td></tr><tr><td>6</td><td>25.40</td><td>30.48</td></tr><tr><td>7</td><td>30.48</td><td>35.56</td></tr><tr><td>8</td><td>35.56</td><td>40.64</td></tr><tr><td>9</td><td>40.64</td><td>45.72</td></tr><tr><td>10</td><td>45.72</td><td>50.80</td></tr><tr><td>11</td><td>50.08</td><td>55.88</td></tr><tr><td>12</td><td>55.88</td><td>60.96</td></tr><tr><td>13</td><td>60.69</td><td>66.04</td></tr><tr><td>14</td><td>66.04</td><td>71.12</td></tr></table>								Poles	Dimensions mm			A	B	2	5.08	10.16	3	10.16	15.24	4	15.24	20.32	5	20.32	25.40	6	25.40	30.48	7	30.48	35.56	8	35.56	40.64	9	40.64	45.72	10	45.72	50.80	11	50.08	55.88	12	55.88	60.96	13	60.69	66.04	14	66.04	71.12
Poles	Dimensions mm																																																											
	A	B																																																										
2	5.08	10.16																																																										
3	10.16	15.24																																																										
4	15.24	20.32																																																										
5	20.32	25.40																																																										
6	25.40	30.48																																																										
7	30.48	35.56																																																										
8	35.56	40.64																																																										
9	40.64	45.72																																																										
10	45.72	50.80																																																										
11	50.08	55.88																																																										
12	55.88	60.96																																																										
13	60.69	66.04																																																										
14	66.04	71.12																																																										
								1		Housing 胶壳		PA66 (UL94V-0/V-2)		1		Transparent 透明白色																																												
								序号		图 号		名 称		材 料		数 量		附 注																																										
		GENERAL TOLERANCES		SCALE: 1:1		NAME		DATE		 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD				PART. NO:																																														
		LINEAR		ANGLES		APPROVED				公司网址: www.szstuo.cn 公司电话: 0755-23765350				ST-WF-508-001Y1																																														
		0.0±0.30		X° REF±6°		DESIGNER				邮 箱: 2850175982@qq.com 公司传真: 0755-23765341				DWG. NO:																																														
UNIT: MM		0.00±0.20		X° ±3°						TITLE:				REV: A0																																														
SIZE: A4		0.000±0.10		X° X'±2°		DRAWN		肖坤权		2017. 06. 16				SHEET: 1/1																																														
A		B		C		D		E		F		G		H																																														