


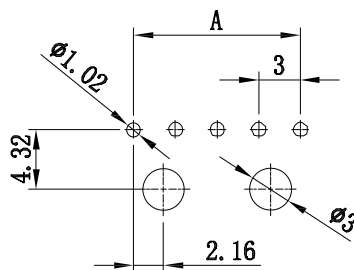
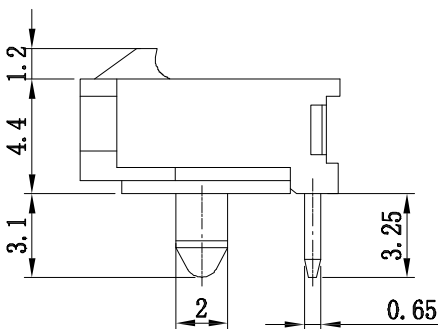
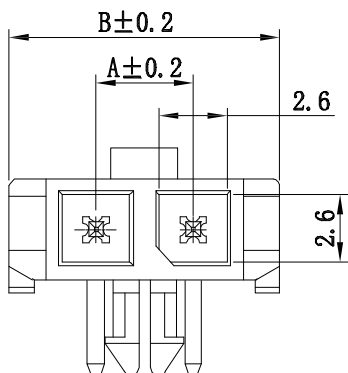



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 250V AC DC
 Rated current: 5.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

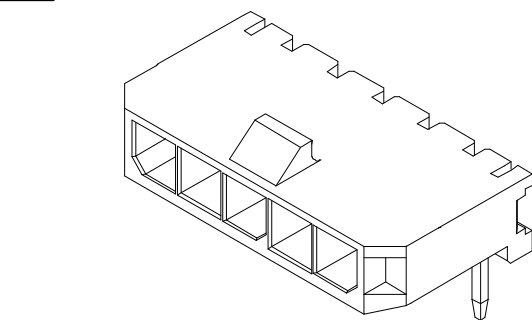

P. C. B LAYOUT

Poles	Dimensions mm	
	A	B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

2		Contact	Brass Tin	N	
1		Housing	PA9T (UL94V-0)	1	Black
序号	图 号	名 称	材 料	数 量	附 注

UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-300-001AW
	LINEAR	ANGLES	1:1				
0.0±0.30	X° REF±6°		APPROVED				
0.00±0.20	X° ±3°		DESIGNER				
0.000±0.10	X° X'±2°		DRAWN	肖坤权	2017.06.16	TITLE: 3.00mmPITCH 90° WAFER DIP TYPE	DWG. NO:
						REV: A0	SHEET: 1/1