


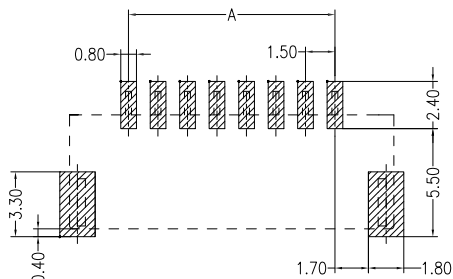
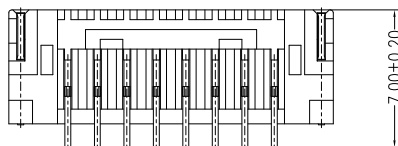



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

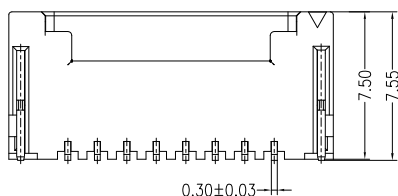

Specifications:
Poles: 02 to 16
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
Rated voltage: 100V AC DC
Rated current: 2.0A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Housing: PA9T UL94V-0, Natural
Contacts: Phosphor Bronze/ Sn-plated
Solder tabs: Brass/ Sn-plated

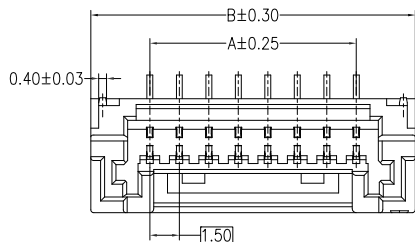

PCB LAYOUT(Tolerance: ± 0.05)

PIN.	DIM A	DIM B	PIN.	DIM A	DIM B
2pin	1.50	7.50	10pin	13.50	19.50
3pin	3.00	9.00	11pin	15.00	21.00
4pin	4.50	10.50	12pin	16.50	22.50
5pin	6.00	12.00	13pin	18.00	24.00
6pin	7.50	13.50	14pin	19.50	25.50
7pin	9.00	15.00	15pin	21.00	27.00
8pin	10.50	16.50	16pin	22.50	28.50
9pin	12.00	18.00			

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-150-007AWV
	LINEAR	ANGLES	APPROVED				DWG. NO:
	0.0 $\pm$ 0.30	X° REF $\pm$ 6°	DESIGNER				REV: A0 SHEET: 1/1
	UNIT: MM	0.00 $\pm$ 0.20	X° $\pm$ 3°	DRAWN	肖坤权		
SIZE: A4		0.000 $\pm$ 0.10	X° X' $\pm$ 2°			TITLE: 1.50mm PITCH 180° WAFER SMT TYPE	