

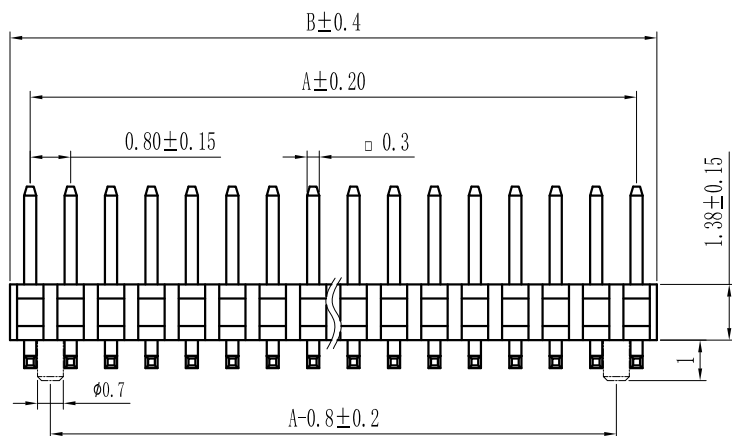

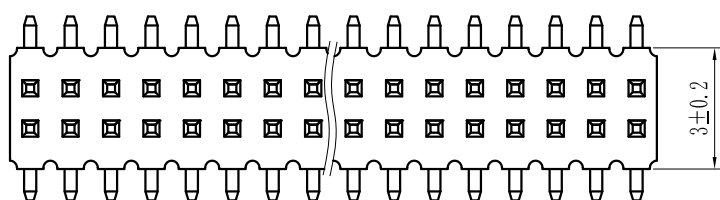


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

Specification:
 Current Rating : 0.75AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 30mΩ Max
 Insulation Resistance : 500MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

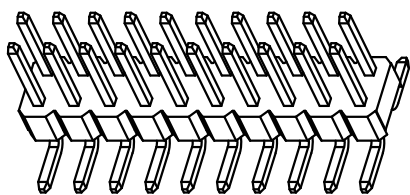

Pin数	尺寸A	尺寸B
2×2	0.8	1.6
2×3	1.6	2.4
2×4	2.4	3.2
2×5	3.2	4.0
2×6	4.0	4.8
2×7	4.8	5.6
2×8	5.6	6.4
2×9	6.4	7.2
2×10	7.2	8.0
2×11	8.0	8.8
2×12	8.8	9.6
2×13	9.6	10.4
2×14	10.4	11.2
2×15	11.2	12.0
2×16	12.0	12.8
2×17	12.8	13.6
2×18	13.6	14.4
2×19	14.4	15.2
2×20	15.2	16.0
2×21	16.0	16.8
2×22	16.8	17.6
2×23	17.6	18.4
2×24	18.4	19.2
2×25	19.2	20.0
2×26	20.0	20.8
2×27	20.8	21.6
2×28	21.6	22.4
2×29	22.4	23.2
2×30	23.2	24.0
2×31	24.0	24.8
2×32	24.8	25.6
2×33	25.6	26.4
2×34	26.4	27.2
2×35	27.2	28.0
2×36	28.0	28.8
2×37	28.8	29.6
2×38	29.6	30.4
2×39	30.4	31.2
2×40	31.2	32.0
2×41	32.0	32.8
2×42	32.8	33.6
2×43	33.6	34.4
2×44	34.4	35.2
2×45	35.2	36.0
2×46	36.0	36.8
2×47	36.8	37.6
2×48	37.6	38.4
2×49	38.4	39.2
2×50	39.2	40.0

PCB LAYOUT

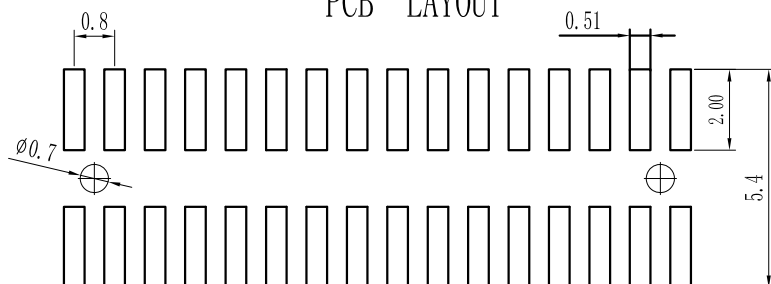

GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.30 X° REF±6°

0.00±0.20 X° ±3°

0.000±0.10 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖坤权

2017. 06. 16



深圳市思拓展电子有限公司

SHENZHEN SINOTOP ELECTRONICS CO.,LTD

公司网址: WWW.SZSITUAO.CN

邮箱: 2850175982@qq.com

公司电话: 0755-23765350

公司传真: 0755-23765341

TITLE:

0.8*1.2 Pin Header, Single Plastic,
Dual Row, SMT Type

PART. NO:

ST-PH-080-0001

DWG. NO:

REV: A0

SHEET: 1/1